


Precision Leveler EcoMaster® 25

for sheet metal parts up to 3 mm thick

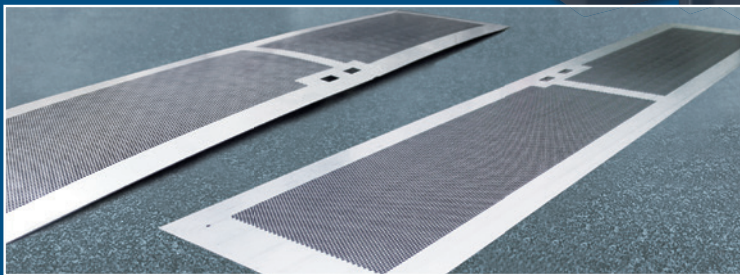

▲
before

▲
after

Machine type	EcoMaster® 25 30	EcoMaster® 25 50	EcoMaster® 25 80
Part thickness (mm)	0.2–3.0	0.2–3.0	0.2–3.0
Max. part width (mm)	300	500	800
Min. part length (mm)	45	45	45
Leveling speed (m/min)	3–20	3–20	3–20
Quick-change system	standard	standard	standard
Automatic setting	optional	optional	optional
CE-Certification	standard	standard	standard
Dimensions (mm) (length x width x height)	1,680 x 1,540 x 1,750	1,680 x 1,780 x 1,750	1,680 x 2,040 x 1,750
Total weight (kg)	2,500	3,000	3,500




Unique - The ARKU quick-change system offers the advantage of cleaning and changing the leveling rollers and back-up rollers in just a few minutes.



EcoMaster® – Consistent leveling results. Ideal for the use in the automotive industry, laser job shops and aerospace industry.

Leveling performance diagram EcoMaster® 25

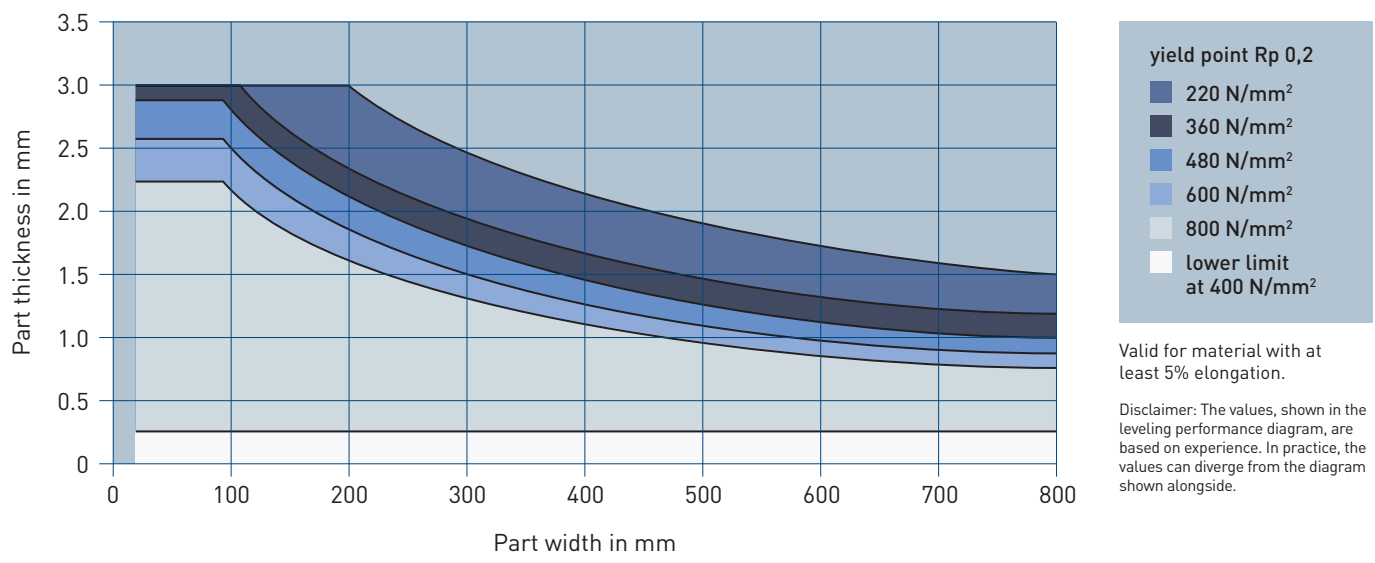

- yield point Rp 0,2
- 220 N/mm²
 - 360 N/mm²
 - 480 N/mm²
 - 600 N/mm²
 - 800 N/mm²
 - lower limit at 400 N/mm²

Valid for material with at least 5% elongation.

Disclaimer: The values, shown in the leveling performance diagram, are based on experience. In practice, the values can diverge from the diagram shown alongside.